

DAIMLER  
MAJESTIC  
MAJOR

4.5 LITRE V


# GRACIOUS MOTORING

## IN THE MODERN MANNER

**O**UTSTANDING in any company with its impeccable appearance and perfect manners, the Majestic Major combines dignity with high performance to an extent which offers new delights to the connoisseur. The 4½-litre V-type 8-cylinder engine delivers its tremendous power smoothly and silently and with a degree of flexibility which is truly remarkable.

With speeds well in excess of 120 m.p.h. at your command, the Majestic Major is supremely safe, thanks to perfect road holding and disc brakes which are fitted on all four wheels. Power-assisted steering is also available. Elegantly appointed as befits its famous marque and providing refined comfort for six people, pride of ownership takes on a new meaning when one owns a Majestic Major.



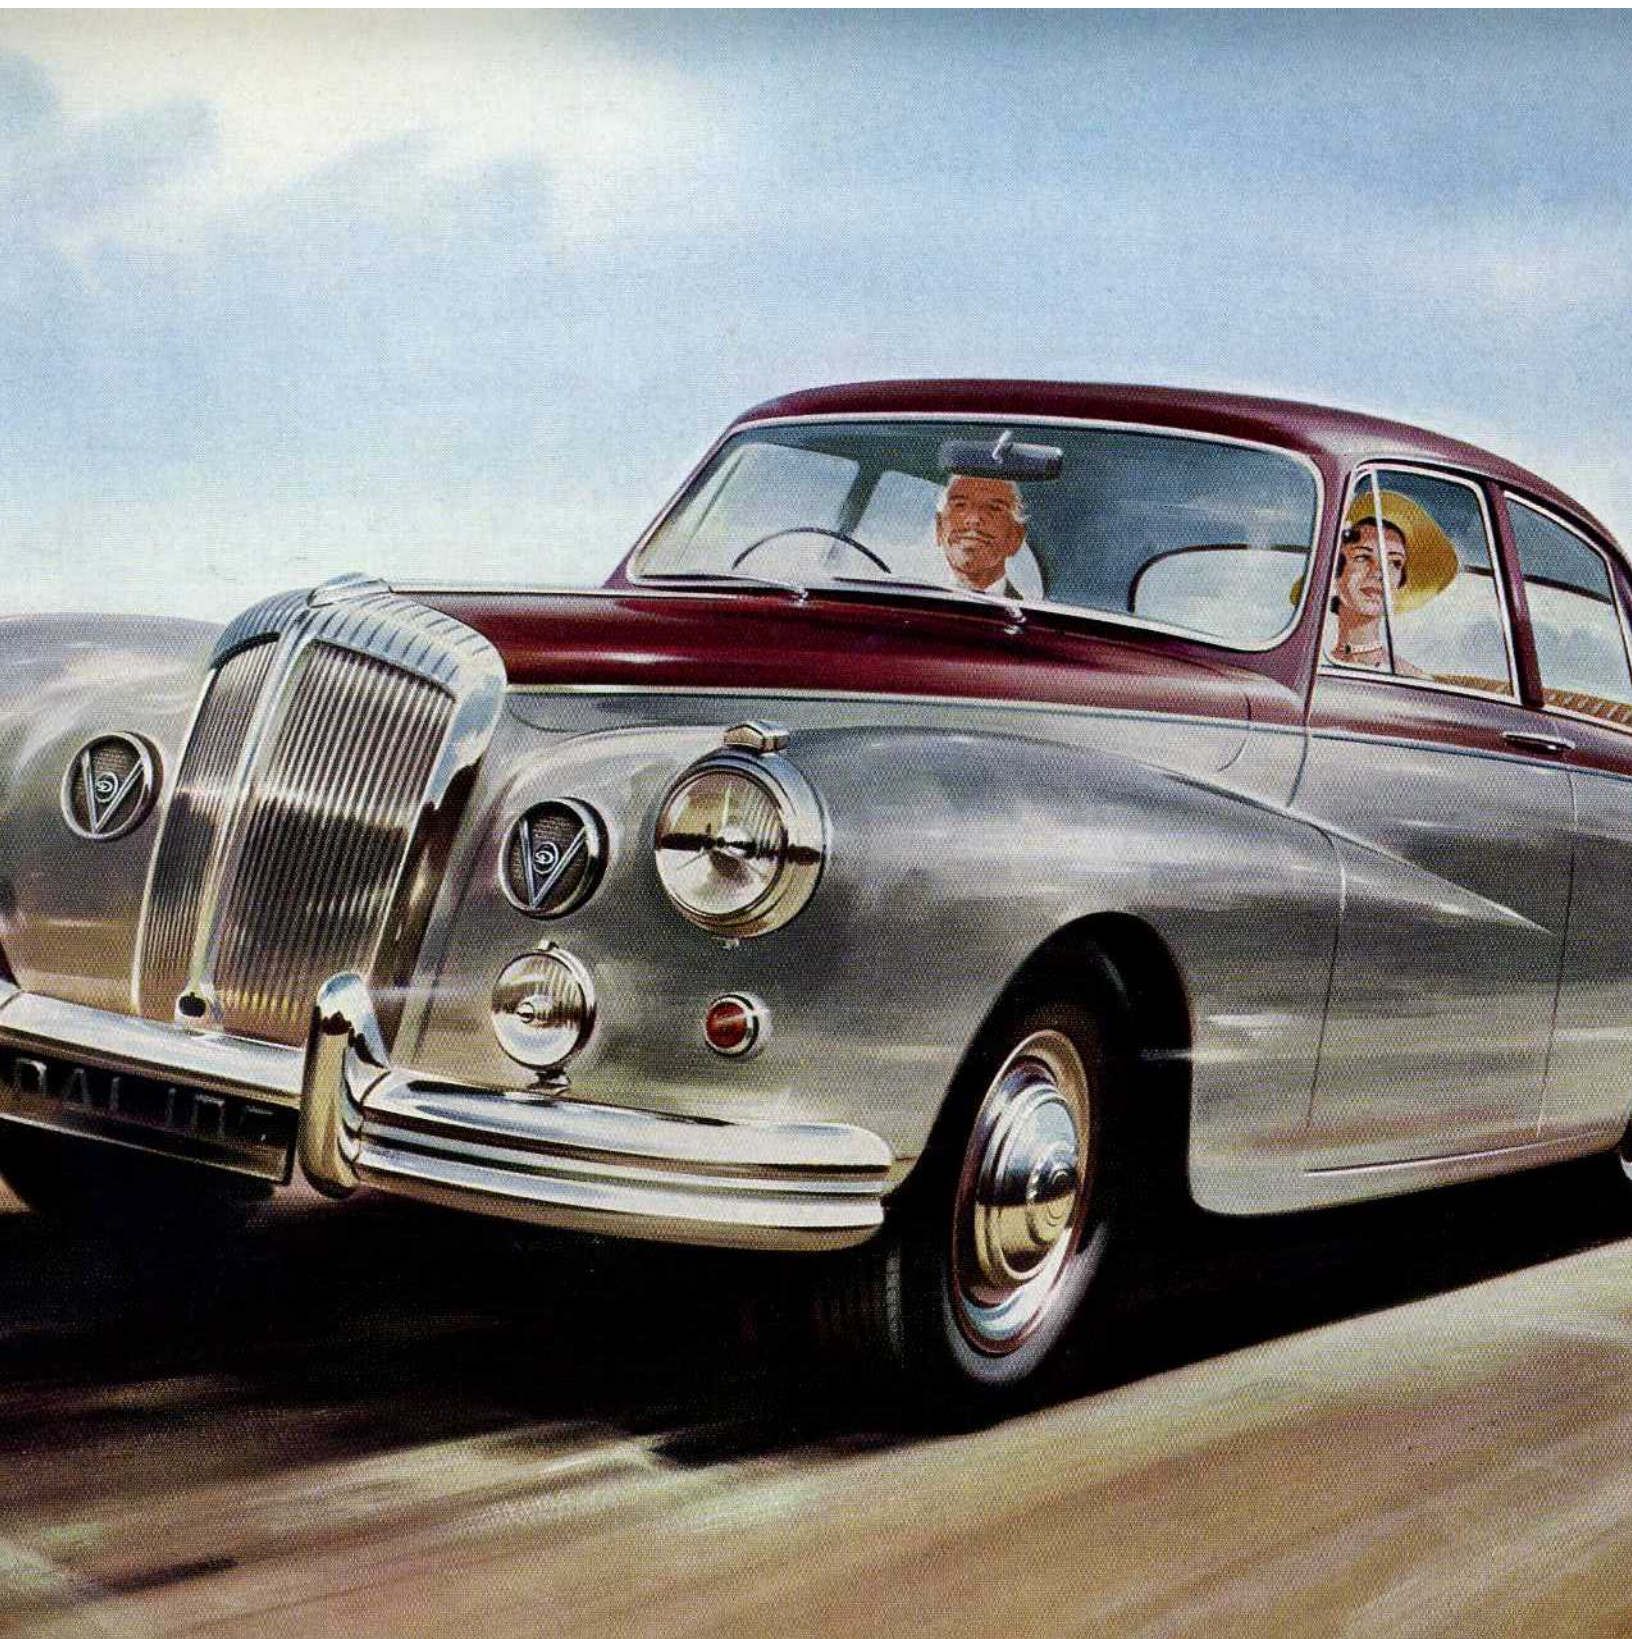



# S P E C I F I C A T I O N

Engine. Twin S.U. Type H.D.8 carburettors and double exhaust  
5 mm. bore and 80.01 mm. stroke. Cubic capacity 4,561 c.c.  
(. Compression ratio 8 : 1. Develops 220 b.h.p. at 5,500 r.p.m.  
num torque of 283 lbs./ft. at 3,200 r.p.m.). Overhead valves  
short pushrods from chain driven central camshaft. Cooling by  
an with by-pass thermostat control. Forced lubrication by  
ump system incorporating full flow filter. Chrome iron cylinder  
der head of high tensile aluminium alloy with hemispherical  
chambers. Aluminium alloy pistons. Steel connecting rods.  
er counterweighted crankshaft carried in five (massive) bearings.

N

Automatic Transmission with driver controlled intermediate gear  
ratios: Low 17.4/8.701 ; Intermediate 10.8/5.418 ; Direct top 3.77.  
lever on steering column.

front suspension incorporating wishbones and coil springs with  
shock absorbers and transverse anti-roll bar. Rear suspension by  
leaf springs and telescopic shock absorbers.

ge-type disc brakes on all four wheels. Vacuum servo assistance.  
ndbrake mounted under facia actuates brake fluid level warning

and steering, 18" diameter adjustable three spoke steering wheel.  
t-hand steering optional. Turning circle 42 ft.

## TYRES

bolt-on disc wheels fitted with Dunlop 7.00  $\times$  16 in. Road  
Spare wheel and tyre.

ric dual pump. 16 Imperial gallon tank capacity.

## EQUIPMENT AND INSTRUMENTS

t battery. 72 amp./hr. at 20 hr. rate with current voltage control.  
namo. Sidelamps with driver visible ruby glass inserts to warn of  
faired into tops of front wings. Headlamps controlled by foot-  
switch. Fog and pass lamps. Separate stop/tail direction and  
nts. Number plate lamp and reflectors. Self-cancelling flashing  
icators with warning light. Panel light. Two interior courtesy  
operated with independent switches for reading-lamp filaments.

Cigar lighter with luminous socket. Twin blended note horns.  
two-speed self-parking windscreen wipers. Electrically operated  
washers. Starter motor. Vacuum and centrifugal automatic ignit  
Coil ignition. 5" diameter speedometer. 5" diameter revolut  
Electrically operated ammeter, water temperature gauge, clock  
with reserve switch, combined handbrake and brake fluid level w

## BODY

All steel four-door six-seater saloon. Separate cruciform braced b  
chassis for rigidity and strength. Large windscreen with slim pilla  
wrap-round rear window for maximum visibility front and  
doors for ease of entry and exit. Panoramic rear view mirror.  
plated window frames on all doors. Push button door handle  
holstered in finest quality Vaumol leather hide over deep Dun  
rubber cushions. Bench front seat (or optional individual seat  
for reach. Folding centre armrests front and rear. Rear armrest  
storage compartment with hinged lid. Seats incorporate flush fit  
the back of the squabs. Polished figured walnut instrument p  
revolution counter, speedometer and separate instruments for wa  
ture, fuel gauge, ammeter and clock. Instrument panel also  
large central ashtray and glove compartments either side. Th  
the passenger's side is fitted with a lockable lid. Provision for  
spoke steering wheel and central horn button. Front and rear door  
large pockets and armrests. Ashtray in rear of front seat squab  
pivoted sun vizors. Deep pile carpets over thick felt underlay.  
carpet at rear. Heavy duty wrapround bumpers with over-riders  
plated door locks.

## HEATING AND DEMISTING

New high output heating system incorporating windscreen demis  
frosting. Booster fan controlled by switch on instrument panel.

## LUGGAGE ACCOMMODATION

Ample luggage accommodation is provided in a capacious rear lo  
automatic light. 20 cu. ft of luggage space available.

## SPARE WHEEL AND TOOLS

The spare wheel is carried beneath the boot floor and is readi  
The tools, in a special container, are housed in the luggage  
together with the jack and wheel brace.

## JACKING

Jacking posts, front and rear, enable the car to be lifted with the  
effort by means of the jack provided.

## PRINCIPAL DIMENSIONS

Wheelbase 9' 6", track front 4' 9", track rear 4' 9", overall le  
overall width 6' 1 $\frac{1}{4}$ ", overall height 5' 2 $\frac{3}{4}$ ", ground clearance 7".